

IPC-210J-2R


21.5" Wide LED Industrial Panel PC with intel®
Celeron (Four-core 2.0G) Processor

Features

1. 21.5" Full HD LED Panel support 1920 × 1080pixel
2. Intel Celeron J1900 (Four-core 2.0GHz processor) CPU with 1333 MHz FSB
3. Front 6mm aluminum bezel with IP65 compliant
4. Front hardness glass protect screen (touch option)
5. 6COM (1xRS485), 1xLPT, 2x PS/2, 1xVGA, 4xUSB, 2xLAN, 1x AUDIO、MIC
6. 1xPCI Slot, 1 xMini PCIe slot
- 7.Back For Power LED and HDD LED Indication
8. Wireless LAN with antenna (option)
9. Panel (Flush) mount with clip
10. DC12V input (option Wide range DC 8-30V input)
11. Standard VESA 75/100mm support stand ,wall mount and swing arm



I/O Appearance

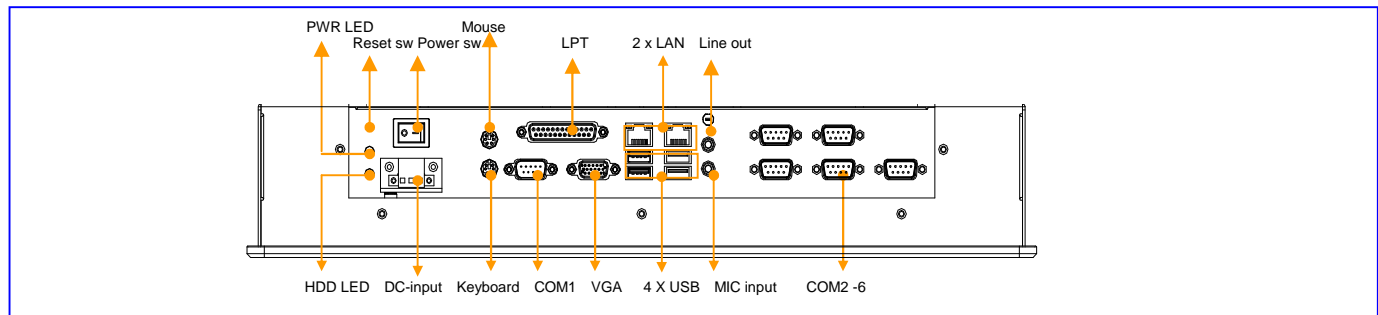

Various applications

1. Control or data entry operator interfaces
2. Information management and retrievals
3. Entertainment management systems
4. Point of sale (POS) terminals
5. Banking /office automation

Specifications

System	CPU	Intel Celeron J1900 (Four-core 2.0GHz processor) CPU with 1333 MHz FSB
	Chipset	Intel Bay trail SOC
	Memory	1x SODIMM DDR3 1600/1333 SDRAM up to 8 GB
	HDD	Space for 1x 2.5" 500G SATA HDD
	Ethernet	Two LAN onboard: 2x Realtek ® RL8111x (Gigabit) 10/100/1000Ethernet
	Graphic	Intel HD chipset
	Audio	Realtek ® ALC662, 5.1 channel surround audio
	Mounting	Panel / VESA 75 X 75mm and 100 x 100mm
	Construction	Aluminum front bezel and Aluminum chassis
	DimensionWxHxD (mm)	550 x 345 X 71.5mm
	NET Weight (kgs)	11 KG

IPC-210J-2R

21.5" Wide LED Industrial Panel PC with intel®

Celeron (Four-core 2.0G) Processor

OS support	Support DOS, Windows, Netware, Unix, Linux,	
I/O Ports	Serial ports	5 x RS-232, 1 x RS422/485
	Parallel ports	1 x SPP/EPP/ECP port
	Keyboard and Mouse ports	PS/2
	VGA	DB-15 Connector
	Sound	MIC-in / Line-out
	Ethernet	2 x 10/100/1000MLAN port (RJ-45)
	USB port	4 x USB2.0
	DC input Connector	3Pin DC power input terminal block
Environmental Specifications	Operating Temperature	0 °C to 45°C (32 °F~113 °F)
	Storage temperature	-20 °C to 60 °C (-4 °F~140 °F)
	Relative Humidity	10% to 90% non-condensing
	Shock (operating)	1G /peak (11m sec)
	Vibration	17 to 500HZ 1G PTP
	Front panel protection	IP65/NEMA 4 compliant
LCD Display	Display Type	21.5" LED panel
	Screenresolution (Pixels)	1920 * 1080
	Brightness	250cd/m2
	Viewing angle	178°(H) , 178°(V)
Touch screen	Internal USB interface controller	
	Resolution: continuous	
	Light transmission: 80% or more	
	Surface hardness : 3H	
	Operating force : ≤100g	
	Life expectancy : 35 Million	
	Support DOS, Windows, Netware, Unix, Linux,	
Power Supply	Output Rating 34W	
	Input Voltage : DC12V, *External AC adapter*	

Ordering Information

IPC-210J-2R	21.5" Full HD Industrial Panel PC support Intel® Celeron Four-core 2.0GHz Processor, with 4G RAM, 2.5" 500G HDD, with Resistive Touch Screen, DC12V input External AC adapter
-------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Dimension Diagram

